CorePro LEDtube

CorePro LEDtube 1200mm 20W 865 I

The CorePro LEDtube is an affordable LED solution suitable for replacing T8 fluorescent lamps. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Product data

• General Characteristics

Main Application	Industrial
Cap-Base	G13
Rated Lifetime (hours)	30000 hr
Nominal Lifetime hours	30000 hr

• Light Technical Characteristics

Color Code	865
Beam Angle	140 D
Correlated Color Temperature	6500 K
Color rendering index	80
Rated Luminous Flux	1600 Lm
LLMF - end nominal lifetime	70 %
Colour consistency	<6
Rated Beam Angle	140 D

• Electrical Characteristics

Wattage	20 W
Voltage	220-240 V
Line Frequency	50/60 Hz
Power Factor	0.9 (min) -
Dimmable	No
Rated Wattage	20 W
Starting Time	0.5 (max) s
Warm-up Time to 60% Light Outp	instant full light
Energy saving product	Yes
Suitable for accent lighting	No

• Temperature Characteristics

T-case maximum	55 (max) C
Operating temperature	-30 (min), 45 (max) C
T-Storage	-40 (min), 65 (max) C

• Environmental characteristics

Energy Efficiency Label (EEL)	A

• Measuring Conditions

Switching cycle	50000X

• Product Dimensions

Length A1	1198.0 mm
Fixing Hole Distance A2 Length	1205.0 mm
Length A3	1212.0 mm
Mounting hole diameter	25.68 mm
Circular outline dimension	28 mm

• Approval & Application Chars

VDE marking	No
CE marking	Yes
UL certificate	No
RoHS compliance	Yes
KEMA Keur certificate	Yes

PHILIPS

CorePro LEDtube

- Product Data

Order code	929000296702
Full product code	929000296702
Full product name	CorePro LEDtube 1200mm 20W 865 I
Order product name	CorePro LEDtube 1200mm 20W 865 I
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8718291669616
Bar code on outerbox - EAN3	8718291669623
Logistic code(s) - 12NC	929000296702
Net weight per piece	0.270 kg

Dimensional drawing

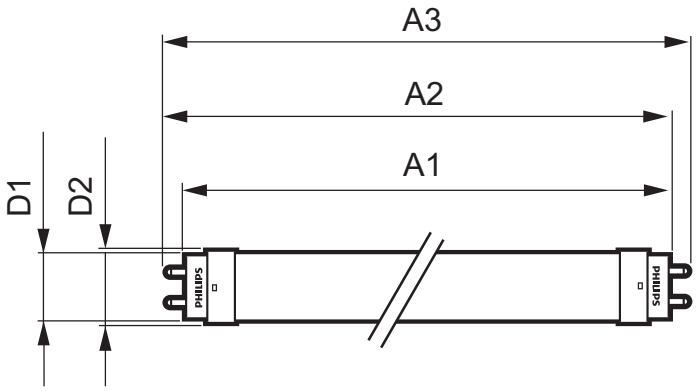

CorePro LEDtube 1200mm 20W 865 I

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	D1 (Norm)	D2 (Norm)
TLED 1200mm 20W865 T8	1198.0	1205.0	1212.0	25.68	28



G13

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, March 31
data subject to change